
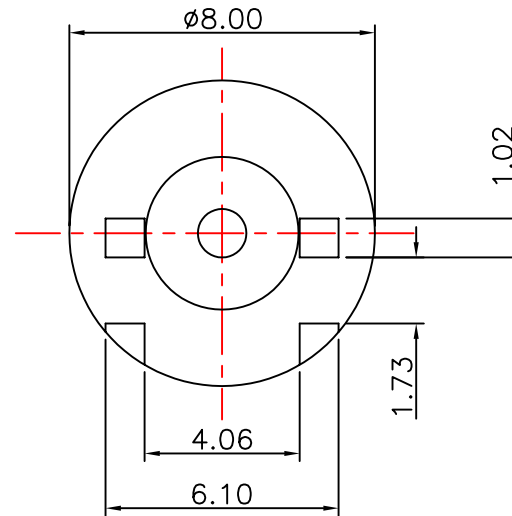


REV.	DESCRIPTION	DRAWN	ECN	DATE
A	NEW RELEASE (3006-6004)	TINA	06-044	02-16'2006

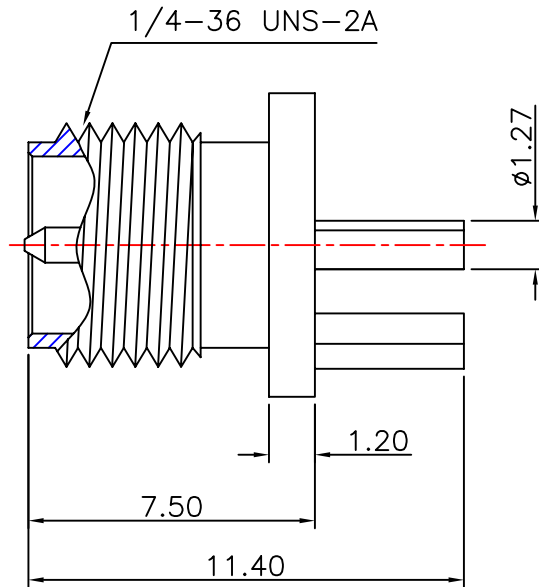

ELECTRICAL RATINGS:

- 1.Impedance : 50 ohms
- 2.Frequency Range : 0~4GHz
- 3.Working Voltage : 500 Vrms maximum
- 4.Dielectric Withstanding Voltage : 1000 Vrms maximum
- 5.Insulator Resistance : 5000 Megohms minimum

INSULATOR	TEFLON	NONE
CONTACT	BERYLLIUM COPPER	GOLD 30U"
BODY	BRASS	GOLD
DESCRIPTION	MATERIALS	FINISHED


REMARK

CORRESPOND WITH

RoHs

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE:

DIMENSION	ANGLE
INTEGRAL DIMENSIONS ±1.0	ANGULAR DIMENSIONS ±5.0°
1 PLACE DECIMAL ±0.3	HOLES UNDER Ø0.5 ±0.1
2 PLACE DECIMALS ±0.15	ROUGHNESS



FINISH: SEE TABLE MATERIAL: SEE TABLE



INPUT OUTPUT
Precise Corp.

DRAWN BY:	TINA	DATE:	02-16'2006
ENGR BY:	TINA	DATE:	02-16'2006
APVD BY:		DATE:	

TITLE: **RP-SMA STRAIGHT JACK EDGE MOUNT RECEPTACLE**

Model NO: 21814

Drawing NO: 12-21814

UNIT:	MM	SIZE:	A4	REV.	A	CAD FILE :
SCALE:	5:1	SHEET	1 OF 1	Z:\NEW Dwg\218XX		