

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black ▲
Contact Pin: Brass ▲


ORDER INFORMATION

5 P H 1 M S B 2 5 - 2 X X X X X N X U - A B C - 0 0



2: Dual Row	No. of contacts Per Row(02~40)	G0: Gold Flash GA: Au 5u" GB: Au 10u" GC: Au 20u" GD: Au 30u" T0: Tin Plated	S0: Selective Au SA: Selective Au 5u" SB: Selective Au 10u" SC: Selective Au 20u" SD: Selective Au 30u" TE: Tin 200u"	N: Non Type	N: W/O Peg P: With Peg	U: RoHS +Hi-Temp.	EX: 060075033 A: 6.0 B: 7.5 C: 3.3
						R: T/R With Cap H: T/R W/O Cap C: Tube With Cap T: Tube W/O Cap	




CAP	L	W	H (Ref.)
> 2 x 4 Pin	10.0	6.3	7.0
≤ 2 x 4 Pin	5.08	6.3	7.0

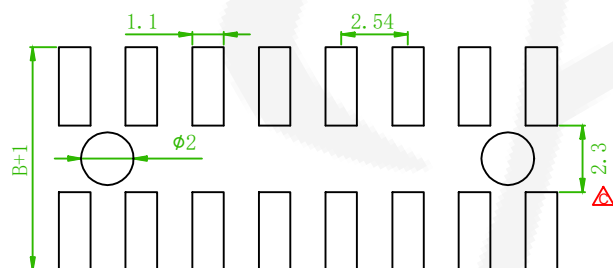

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

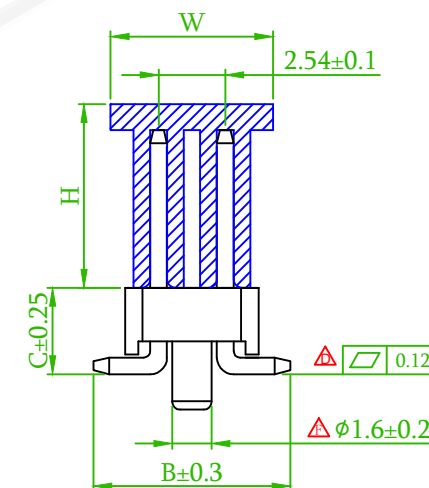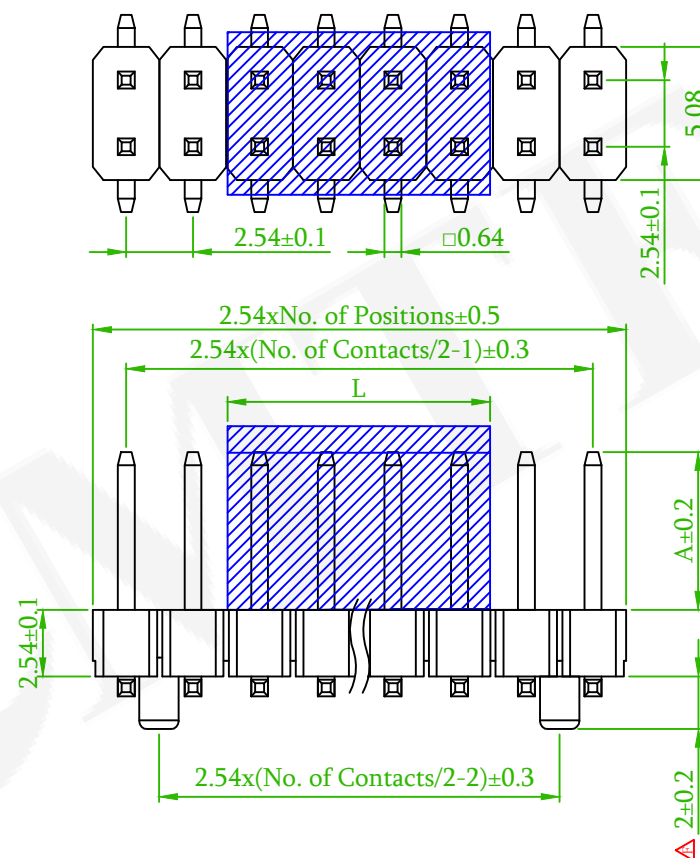

Old Part No. : PH1M25-2XX-U



品名 TITLE	PIN HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PH1MSB25-2XXXXXXNXU -XXXXXXXXXX-00				繪圖 DRAWN	Mia 2016/09/13
圖號 DRAWING NO.	GN110-GA187	版本 REV.	G	核對 CHECKED	Jonny 2016/09/13	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/13	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25 ▲	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
▲ x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/05
▲	Add the Dim.	Mia	2018/05/23
▲	ECN No.:171201, Revise the Cap.	Andy	2017/12/01
▲ x3	ECN NO. 170821: Revise Cap size: 2x3P: 5x6.3x7. Revise the coplanarity: 0.1->0.12. Revise the tolerance.	Gary	2017/08/23