
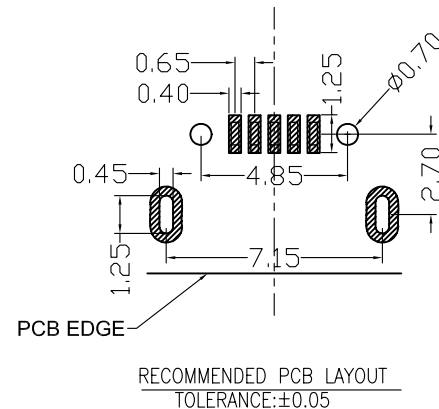
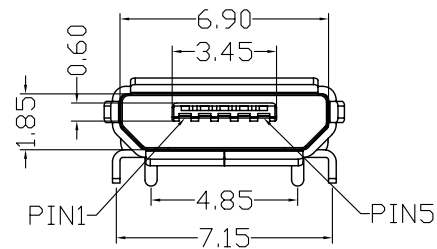
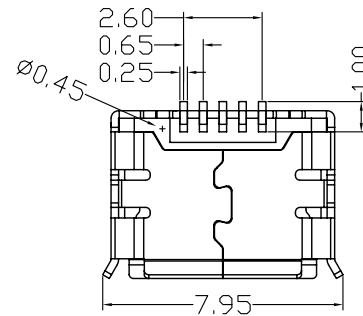




REV.	DESCRIPTION	DRAWN/DATE	APPROVED/DATE

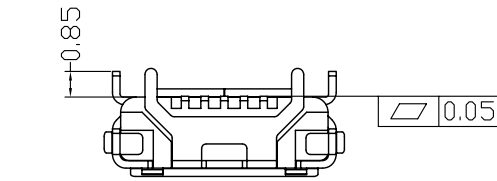

NOTES:

1. MATERIAL:
 - 1.1 HOUSING:THERMOPLASTIC FLAMMABILITY RATING UL94-0
 - 1.2 CONTACT: COPPERY ALLOY T=0.15MM
 - 1.3 SHELL: COPPERY ALLOY T=0.25MM
2. FINISH:
 - 2.1 CONTACT:
 - 1U"MIN,PLATED ON CONTACT AREA
 - G/F PLATING ON SOLDER TAIL AREA
 - 50~80U" NICKEL UNDERPLATING OVERALL
 - 2.2 SHELL:
 - 80~120U" MATTER TIN PLAINING ALL
 - 50~80U" NICKEL UNDERPLATING OVERALL
3. SPECIFICATION:
 - 3.1 CURRENT RATING:0.5A(2.3.4CONTACT)/1.8A (1.5CONTACT)MAX.
 - 3.2 VOLTAGE:30 VAC
 - 3.3 TEMPERATURE RANGE:-30°C~85°C
 - 3.4 CONTACT RESISTANCE:30 MILLIONHM MAX.
 - 3.5 DIELECTRIC WITHSTANDING VOLTAGE;250VAC R.M.S
 - 3.6 INSULATION RESISTNACE:100 MEGOHMS MIN

GENERAL TOLERANCE		ANGLE TOLERANCE		DESIGN	DATE	NINGBO KLS ELECTRONIC CO.,LTD			
X. ±0.35		X°. ±2.0°		ZQL	2016/04/15				
.X ±0.25		.X°. ±1.0°		CHECK	DATE	FILE NAME (品名)		MICRO USB 5PIN 牛角4.85内焊卷口	
.XX ±0.15		.XX°. ±0.5°				PART NO (料号)		KLS1-238A-0-0-0-R	
.XXX ±0.10						DRAWING NO.(图号)			REV. A0
UNIT:mm		SCALE	1:1	APPRO.	DATE				
A4 		SHEET: 1 of 1							