



REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	



ROHS

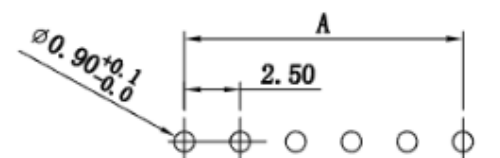

Recommended P.C.Board Hole Layout



2、3PIN

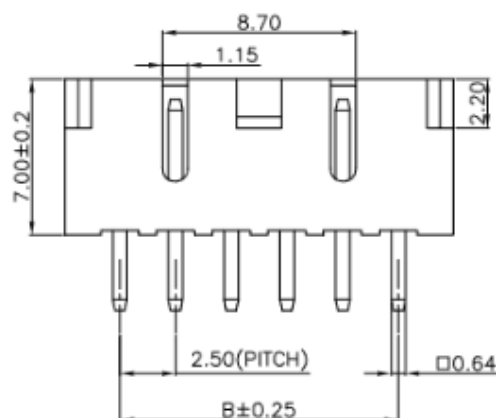

CKT	A	B
2	7.46	2.50
3	9.96	5.00
4	12.46	7.50
5	14.96	10.00
6	17.46	12.50
7	19.96	15.00
8	22.46	17.50
9	24.96	20.00
10	27.46	22.50
11	29.96	25.00
12	32.46	27.50
13	34.96	30.00
14	37.46	32.50
15	39.96	35.00
16	42.46	37.50

Specifications / 技术规格:

Current rating: 3A
额定电流: 3A

Voltage rating: 250V AC,DC
额定电压: 250V AC,DC

Insulation Resistance: 1000MΩ Min.
绝缘电阻: 最小1000MΩ

Withstanding voltage: 1000V AC 1Min
耐电压: 1000V AC 1分钟

Contact Resistance: 20mΩ Max.
接触电阻: 最大20mΩ

Operating Temperature: -25°C to +85°C
工作温度: -25°C 到85°C

Materials / 材料:

Contact Material: Brass(Tin plating)
接触端子材料: 黄铜(镀锡)

Insulation Material: PA or PBT UL94V-0
绝缘体塑胶材质: PA 或 PBT UL94V-0

浙江快利电子有限公司
Zhejiang Kuaili Electronic Co., Ltd

REV. A UNIT. MM SCALE. 1:1

GENERAL TOLERANCE

X* ± 3'	X. ±0.35
.X* ± 2'	.X ±0.25
.XX* ± 1'	.XX ±0.15
.XXX* ± 0.5'	.XXX ±0.10

DESIGN: HELLER

DATE: 2020.09.30

CHECKED:

DATE:

AUDITED:

DATE:

APPROVED:

DATE:

DWG. NO.

PART NO.

KL-XH/MS-NA-H01

TITLE.

XH/MS-NA
(高温料)