

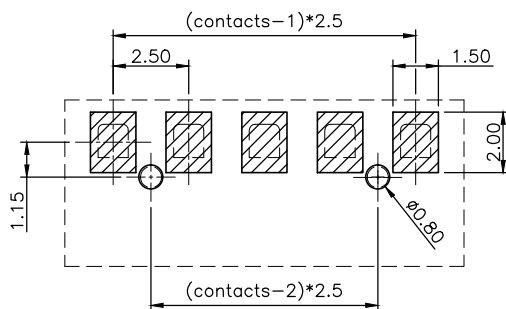
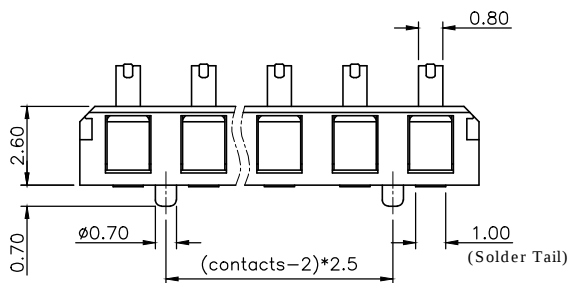
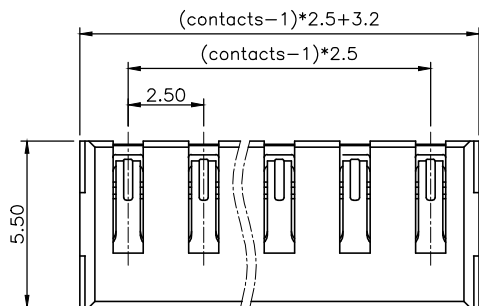


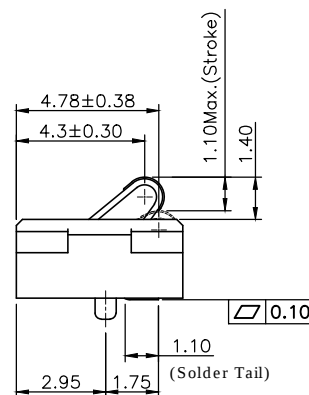

RECOMMENDED LAYOUT (TOP VIEW)
GENERAL TOLERANCE: $\pm 0.05\text{mm}$

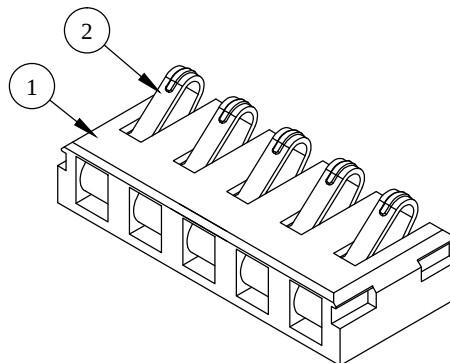

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2020/06/01

SPECIFICATION:

1. ELECTRICAL

- 1.1 Current Rating: 3A
- 1.2 Voltage Rating: 12V
- 1.3 Contact Resistance: 40mΩ Max
- 1.4 Insulation Resistance: 1000MΩ Min
- 1.5 Dielectric Withstanding Voltage: 500VAC

2. MECHANICAL

- 2.1 Normal Force: 200g Min. at Stroke 1.1mm
- 2.2 Durability: 5,000 cycles

3. ENVIRONMENTAL

- 3.1 Operating temperature range: -40 °C~+105°C
- 3.2 Storage temperature range: -40 °C~+105°C

4. SOLDER ABILITY

- 4.1 Recommended IR-Reflow Temperature: 260 °C

How to order:

304D- 2625 XX
1

- 1 pin count: xx= 03~06
(Please contact with sales for the pins count available)

2	Contact	Copper Alloy,	
		Contact area: 5u"Gold plating over Nickel	
		Solder Tail: G/F plating over Nickel	
1	Housing	Thermoplastic, UL 94V-0, Black	
NO	PART NAME	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
m m	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
 ATTEND			
www.attend.com.tw			
DRAWN	Tim	2020/06/01	DRAWN NAME:
CHECKED	Fros	2020/06/01	Battery Connector, Vertical, SMT
			Pitch 2.5, H=2.6, XXPin, 5u", Reel
APPROVED	Ken	2020/06/01	PRODUCT NO.
			304D-2625XX
	SCALE 4/1	SHEET 1/1	SIZE A4
			FILE NAME
			304D-2625XX_B_1



www.attend.com.tw