


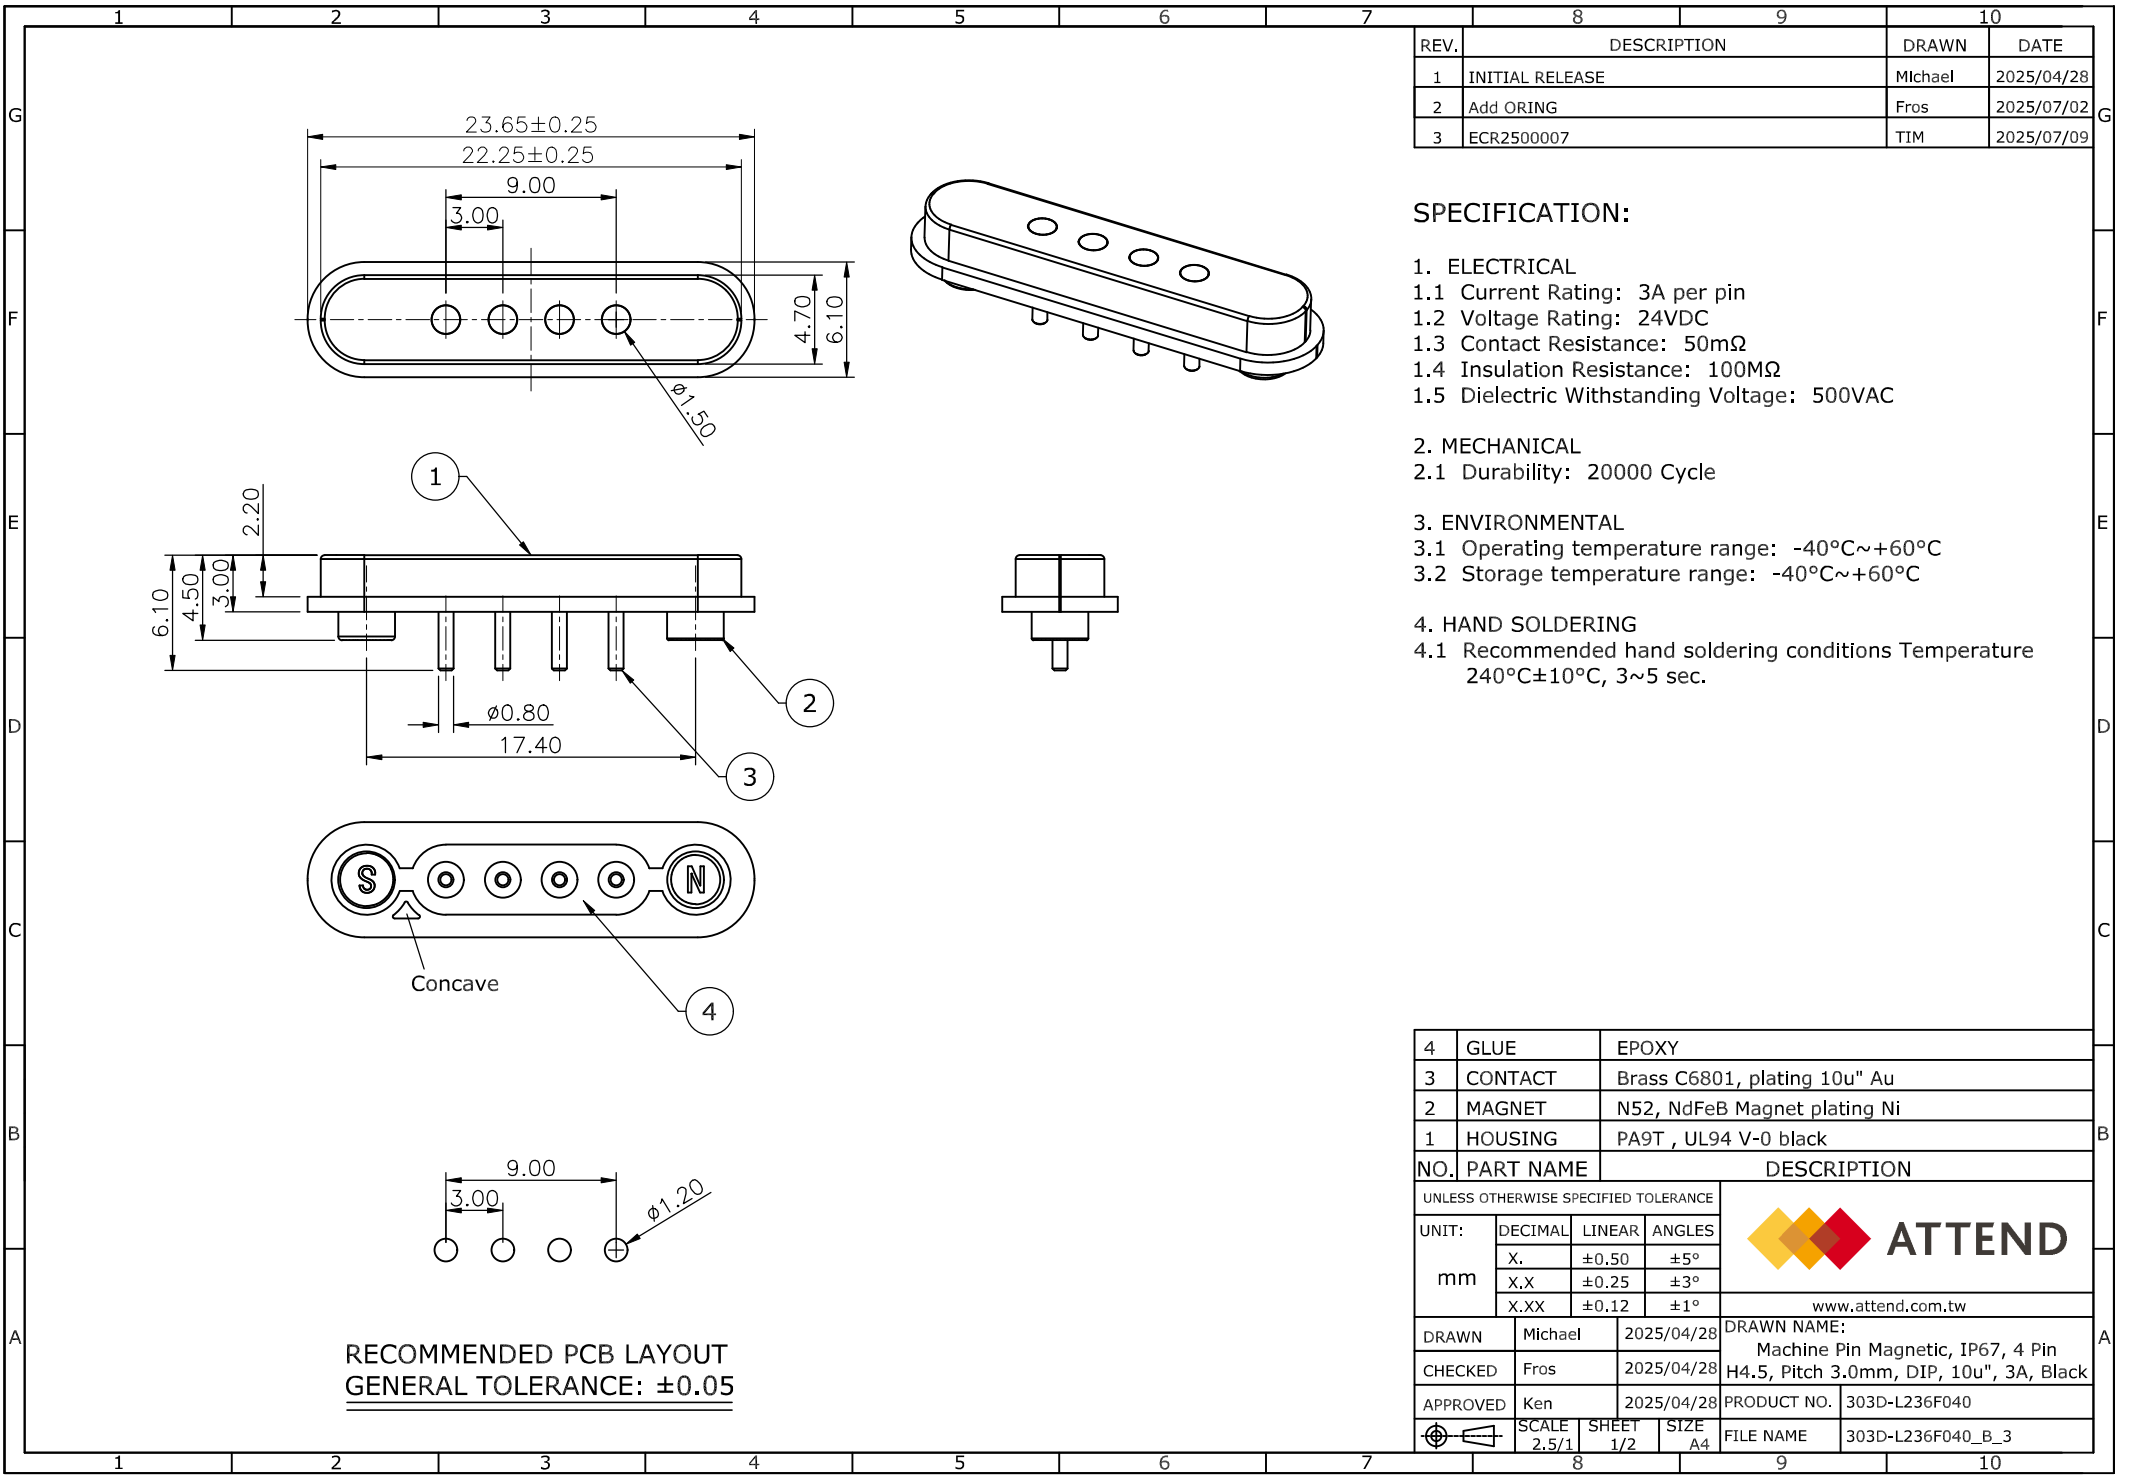


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Michael	2025/04/28
2	Add ORING	Fros	2025/07/02
3	ECR2500007	TIM	2025/07/09

SPECIFICATION:

- ELECTRICAL
 - Current Rating: 3A per pin
 - Voltage Rating: 24VDC
 - Contact Resistance: 50mΩ
 - Insulation Resistance: 100MΩ
 - Dielectric Withstanding Voltage: 500VAC
- MECHANICAL
 - Durability: 20000 Cycle
- ENVIRONMENTAL
 - Operating temperature range: -40°C~+60°C
 - Storage temperature range: -40°C~+60°C
- HAND SOLDERING
 - Recommended hand soldering conditions Temperature 240°C±10°C, 3~5 sec.

4	GLUE	EPOXY	
3	CONTACT	Brass C6801, plating 10u" Au	
2	MAGNET	N52, NdFeB Magnet plating Ni	
1	HOUSING	PA9T , UL94 V-0 black	
NO.	PART NAME	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
			 ATTEND
			www.attend.com.tw
DRAWN	Michael	2025/04/28	DRAWN NAME: Machine Pin Magnetic, IP67, 4 Pin H4.5, Pitch 3.0mm, DIP, 10u", 3A, Black
CHECKED	Fros	2025/04/28	
APPROVED	Ken	2025/04/28	PRODUCT NO. 303D-L236F040
	SCALE 2.5/1	SHEET 1/2	SIZE A4
		FILE NAME	303D-L236F040_B_3

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE: ±0.05

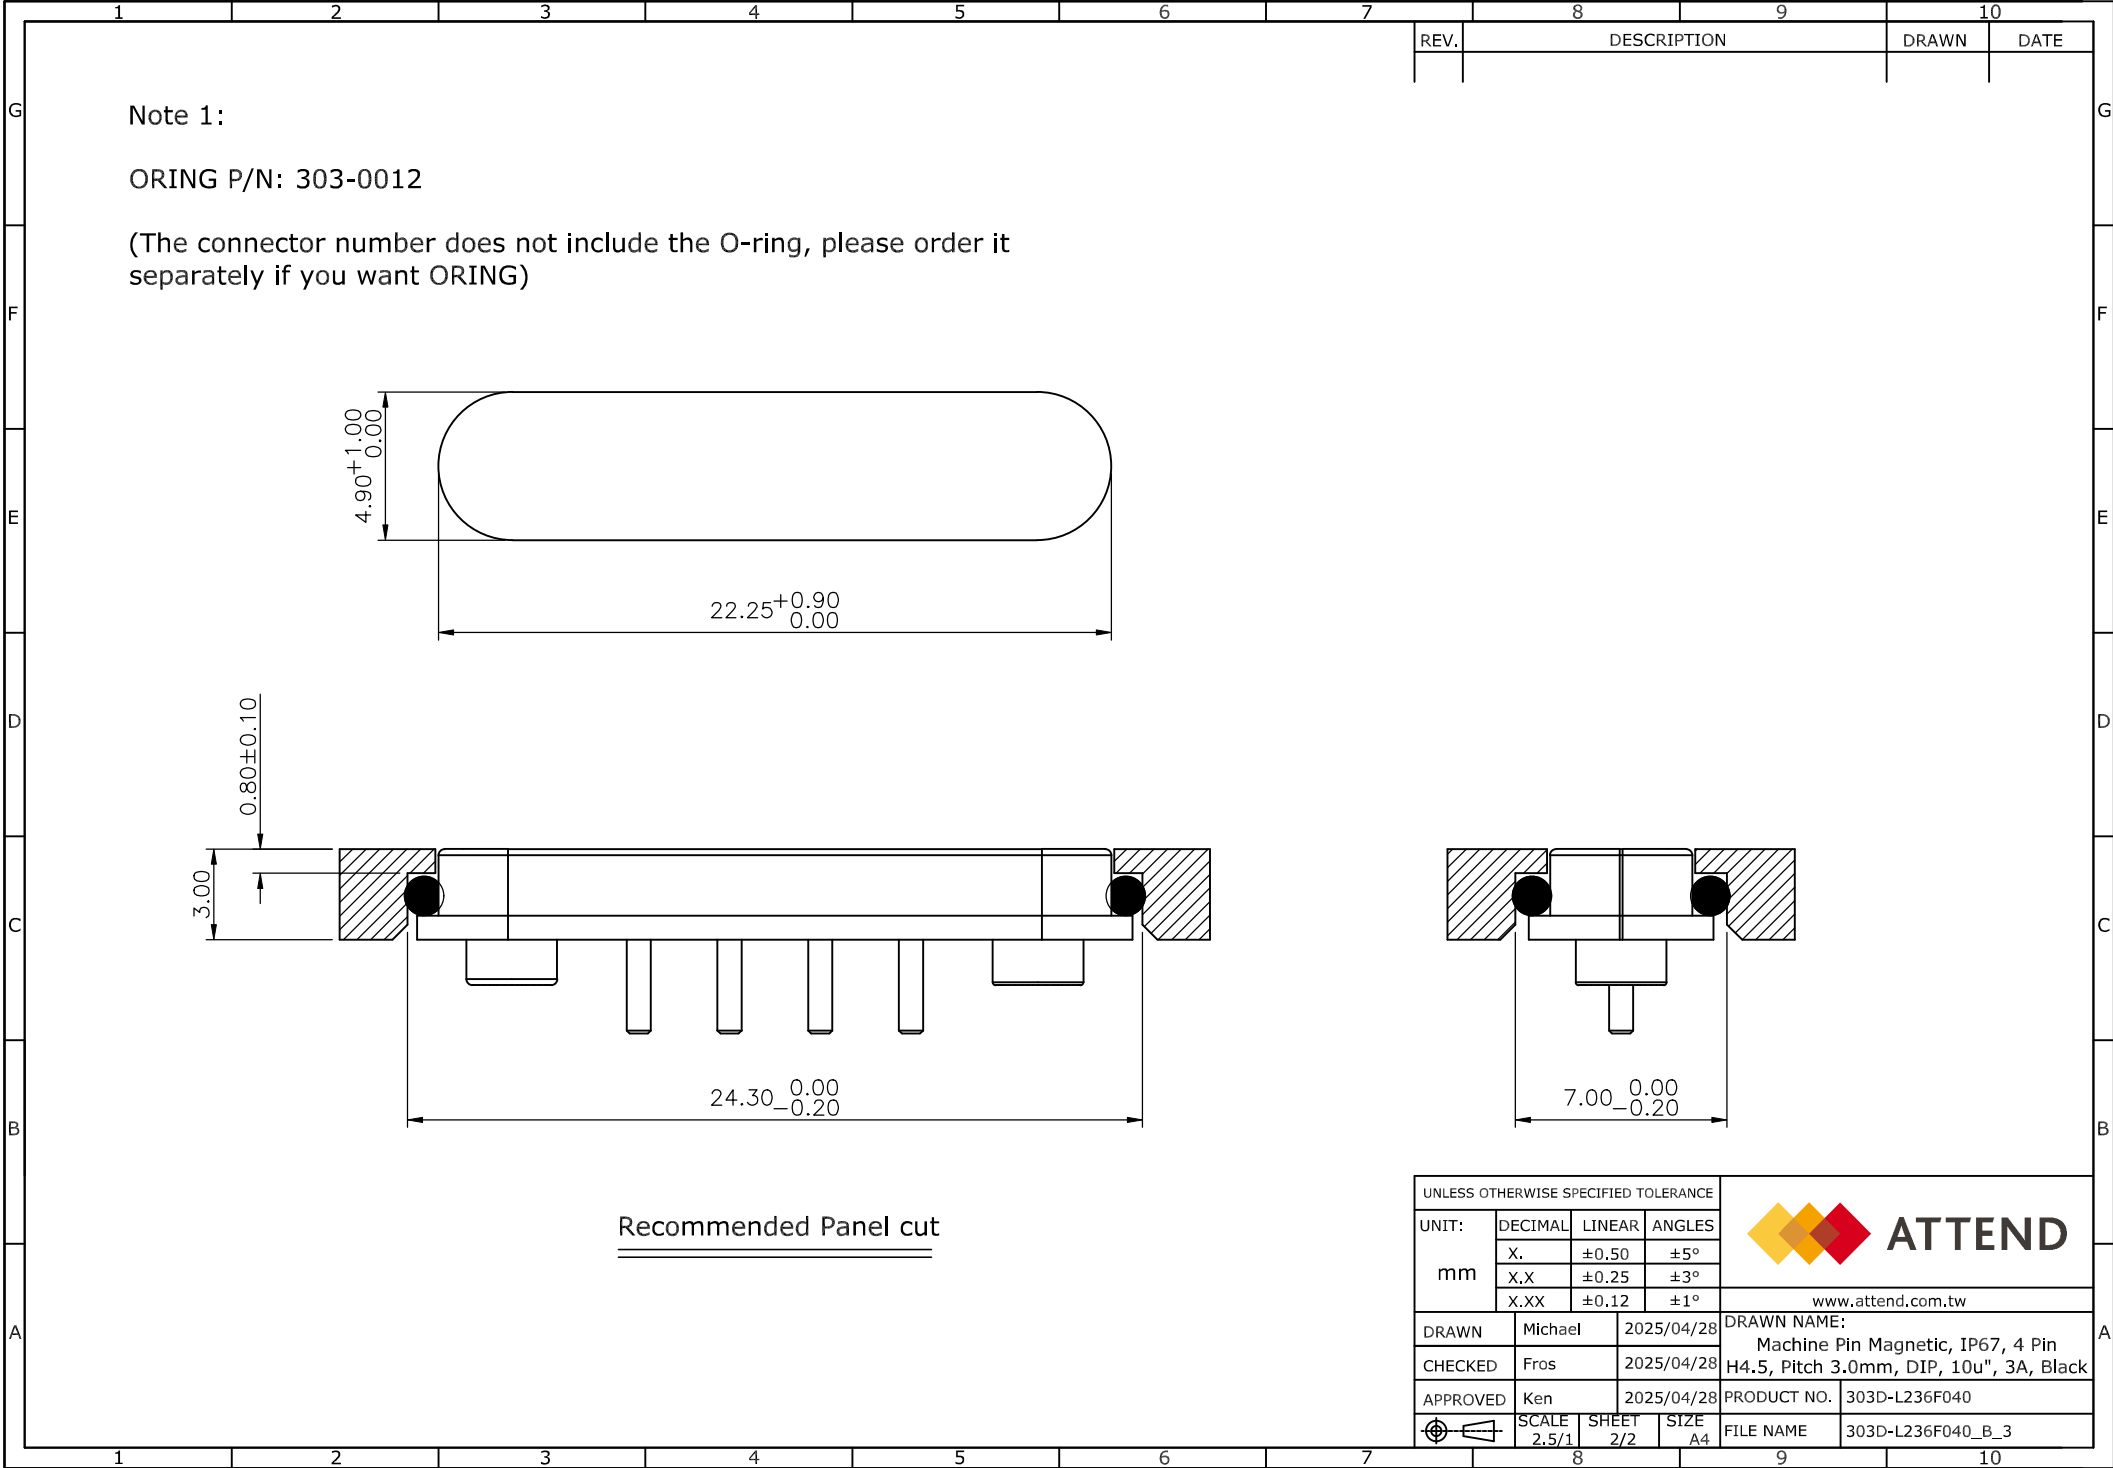

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
				www.attend.com.tw	
DRAWN	Michael	2025/04/28		DRAWN NAME: Machine Pin Magnetic, IP67, 4 Pin H4.5, Pitch 3.0mm, DIP, 10u", 3A, Black	
CHECKED	Fros	2025/04/28			
APPROVED	Ken	2025/04/28		PRODUCT NO. 303D-L236F040	
	SCALE	SHEET	SIZE	FILE NAME	
	2.5/1	2/2	A4	303D-L236F040_B_3	