
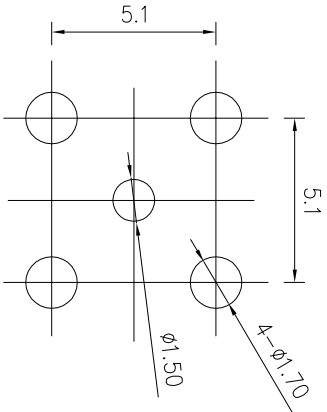


5	6	7
版本	修改内容	修改人
		日期

RP-SMA internal needle

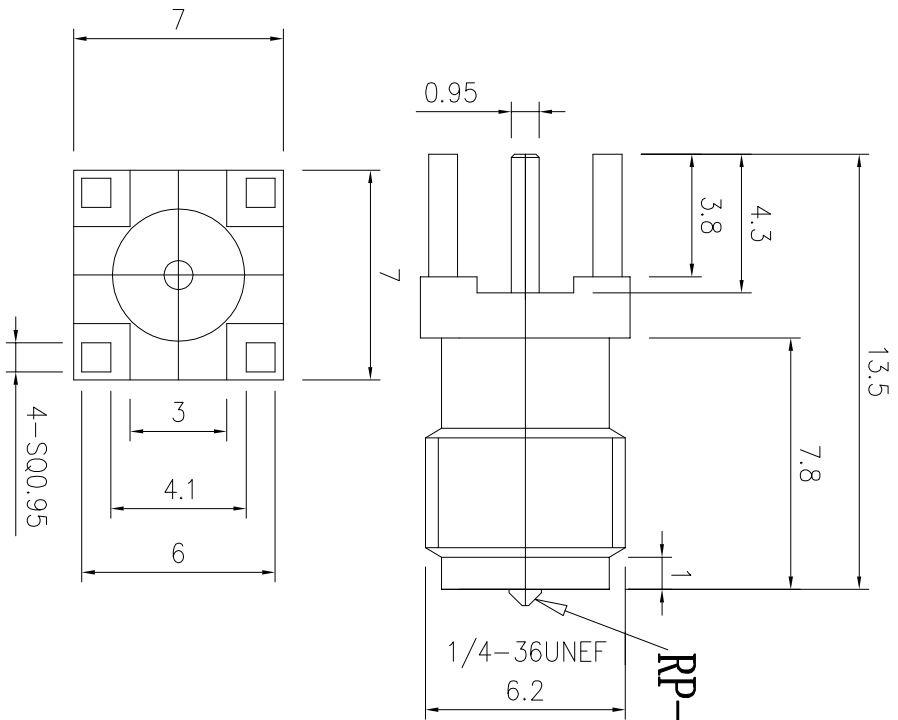

ANGLE PROJECTION	ANGLE PROJECTION
GENERAL TOLERANCE	GENERAL TOLERANCE
100~200 : ± 3.00	100~200 : ± 3.00
50~100 : ± 2.00	50~100 : ± 2.00
25~50 : ± 0.20	25~50 : ± 0.20
10~25 : ± 0.15	10~25 : ± 0.15
1~10 : ± 0.1	1~10 : ± 0.1

- Material requirements:**
- 1. Shell: brass plated
 - 2. Insulator: polytetrafluoroethylene (PTFE)
 - 3. Jack: (HPb59-1)
 - 4. Salt spray 24h

- Technical requirements:**
- 1. Tolerance should be ± 0.2
 - 2. Uniform coating, smooth, no stains, scratches.
 - 3. Materials must meet RoHS requirements.

SUNNYWAY TECHNOLOGY (CHINA) CO., LTD					
	PART NAME : CONRE-adapter	DATE :	20260129		
TOLERANCE X.X ± 0.20 .XX ± 0.10 .XXX ± 0.05 ANGULAR $\angle \pm 0.5^\circ$	PART NO : SW260171A31	DRAWN :	shaobing		
	MATERIAL :	CHECKED :	yujiang		
	FINISHING :	APPROVED :			
UNIT : mm	COLOUR :	SCALE : 1:1	REV : TA		