

MATERIAL

Insulator:PBT, UL94V-0, Black
Contact Pin:Brass

ORDER INFORMATION

5 P S 1 S D A 8 5 - 1 X X X X N N N X L - 0 0

1:Single Row

No. of Pin
Per Row(02~40)

◎G0:Gold Flash

GA:5u" SA:5u"

GB:10u" SB:10u"

GC:20u" SC:20u"

GD:30u" SD:30u"

T0:Tin Plated

TE:Tin 200u"

N:W/O Peg

N:W/O Bump

◎T:Tube, W/O Cap

C:Tube, With Cap

H:Tape & Reel, W/O Cap

R:Tape & Reel, With Cap


A:Tray, W/O Cap

P:Tray, With Cap

X:Box, W/O Cap 

N:Non Type

RoHS

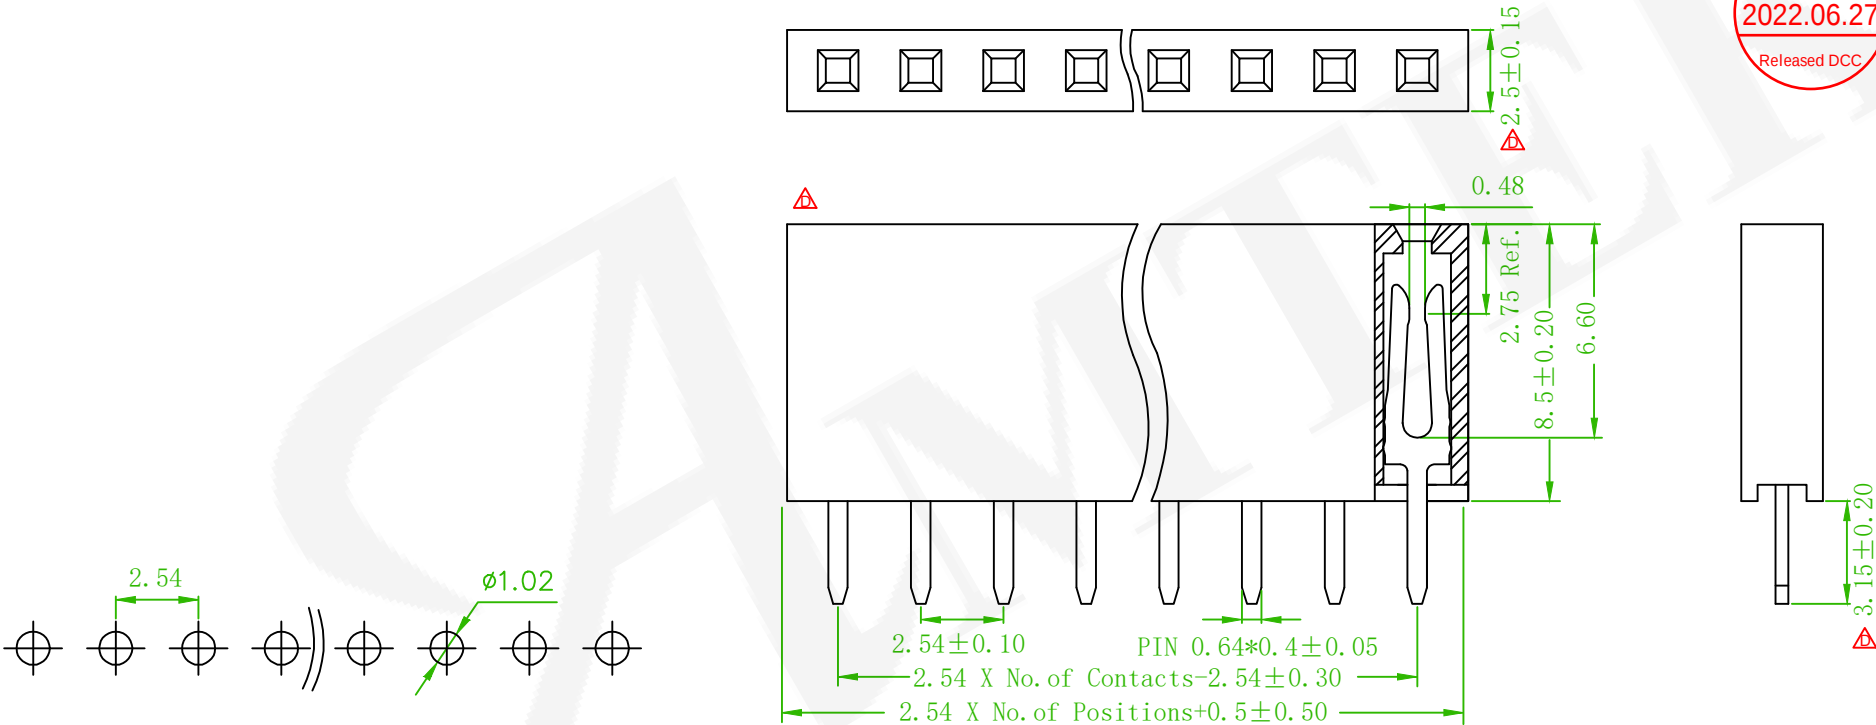

 Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PS1S85-1XX-L

 X1	ECN NO.:220102 Revise the drawing	Alice	2022/05/05
 X5	ECN NO.:210308 Revise the Drawing	Alice	2021/04/09
 X1	Add the Package:Box	Benson	2020/12/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm V/T S/R DIP TYPE				頁數 Page	1/1
品號 PART NO.	5PS1SDA85-1XXXXNNNXL-00				繪圖 DRAWN	Jeff 2015/08/27
圖號 DRAWING NO.	GN003-MC866	版本 REV.	E	核對 CHECKED	John 2015/08/27	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/27	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	