

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2016/03/29


SPECIFICATION:

Current Rating: 5A



Voltage Rating: 125V

Waterproof: IPX7


Operation Temperature: -40°C to 85°C

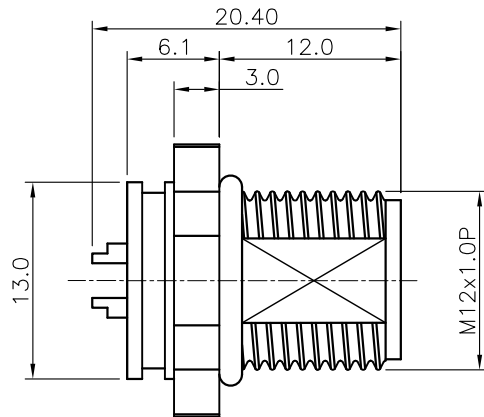


BODY

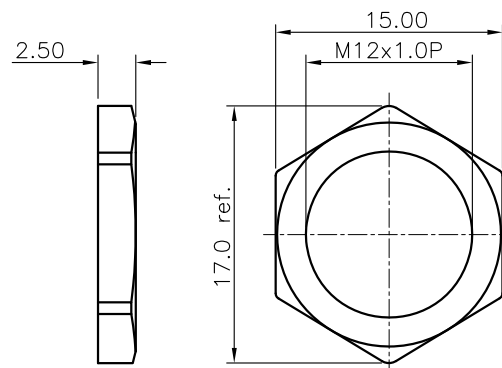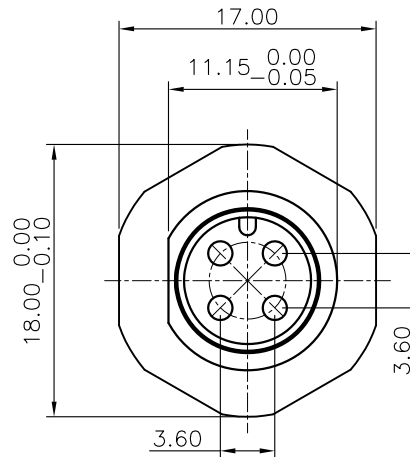

NUT



PANEL CUT-OUT

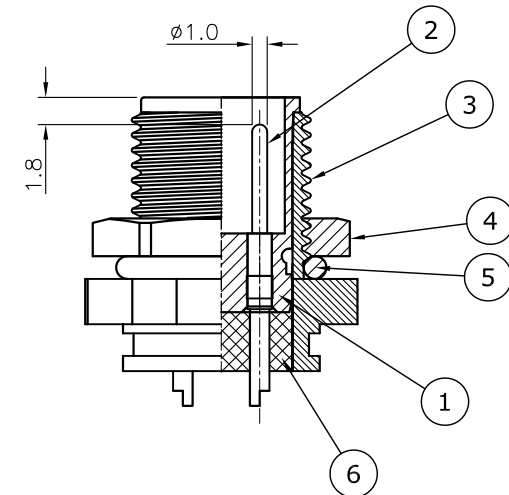

6	Epoxy	Black			
5	ORING	EPDM, Black			
4	NUT	Brass, Nickel plating			
3	SHELL	Brass, Nickel plating			
2	CONTACT	Brass, 10u" Gold plating under Nickel			
1	HOUSING	PBT, UL94V-0, Black			
NO.	PART NAME	DESCRIPTION			
UNLESS OTHERWISE SPECIFIED TOLERANCE					
UNIT:	DECIMAL	LINEAR	ANGLES		
mm	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
			WWW.ATTEND.COM.TW		
DRAWN	Fros	2016/03/29	DRAWN NAME: M12 A-Code Receptacle, 4 Pin Male Solder Type Front Fastened		
CHECKED	Amy	2016/03/29			
APPROVED	Ken	2016/03/29			
	SCALE	SHEET	SIZE	PRODUCT NO.	216A-04MAF
	2/1	1/1	A4		
	FILE NAME				



WWW.ATTEND.COM.TW

DRAWN NAME:
M12 A-Code Receptacle, 4 Pin
Male Solder Type Front Fastened

PRODUCT NO. 216A-04MAF