


Datasheet

LL01ZZ-DBI××L06-M2

Available Distribution



Dimensions


Part Number	Diameter	Height
LL01ZZ-DBI××L06-M2	Ø15.3	9.1

*All dimensions are in millimeters.

LED



Packaging Details (SPQ)



Recommend Applications



General Information



- Lens Material PMMA 8N
- Operating Temperature -40°C~+70°C
- Light Transmission Rate 400nm~900nm > 90%
- ✓ If necessary, Clean lenses with mild soap, water and soft cloth.
- ⚠ Never use any commercial cleaning solvents on lenses, like alcohol.
- ⚠ Please handle or install lenses with wearing gloves, skin oils may damage lens or its optical characteristic.

Accessories




- Available with Holder LL01ZZWM30H2

Mechanical Specification

*All dimensions are in millimeters.


Lens Dimension

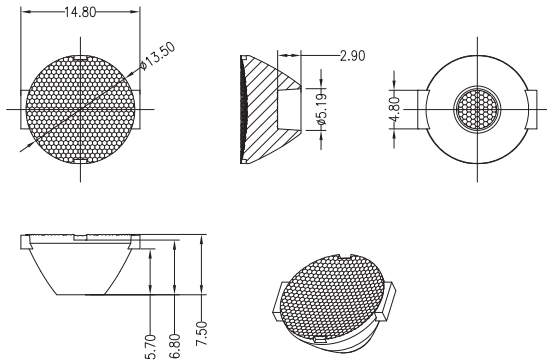

Holder Dimension




LL01ZZWM30H2

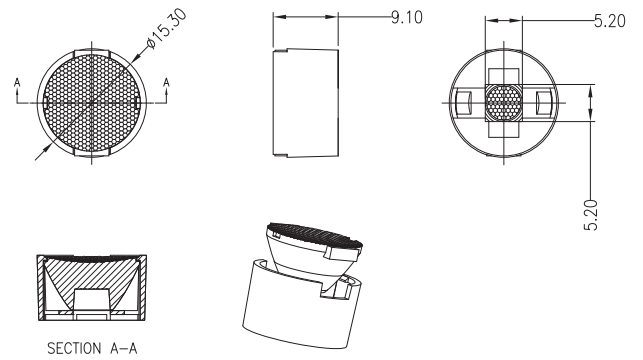


Assembly Instruction

Fixing Method

Part No LL01ZZ-DBI××L06-M2
Holder LL01ZZWM30H2

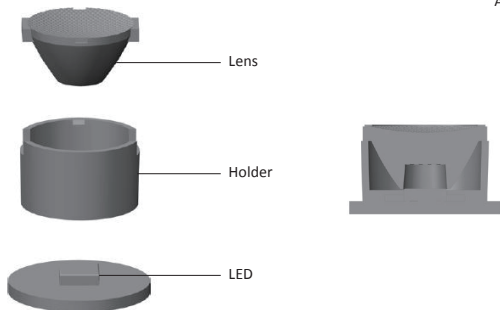

Photometric Distribution

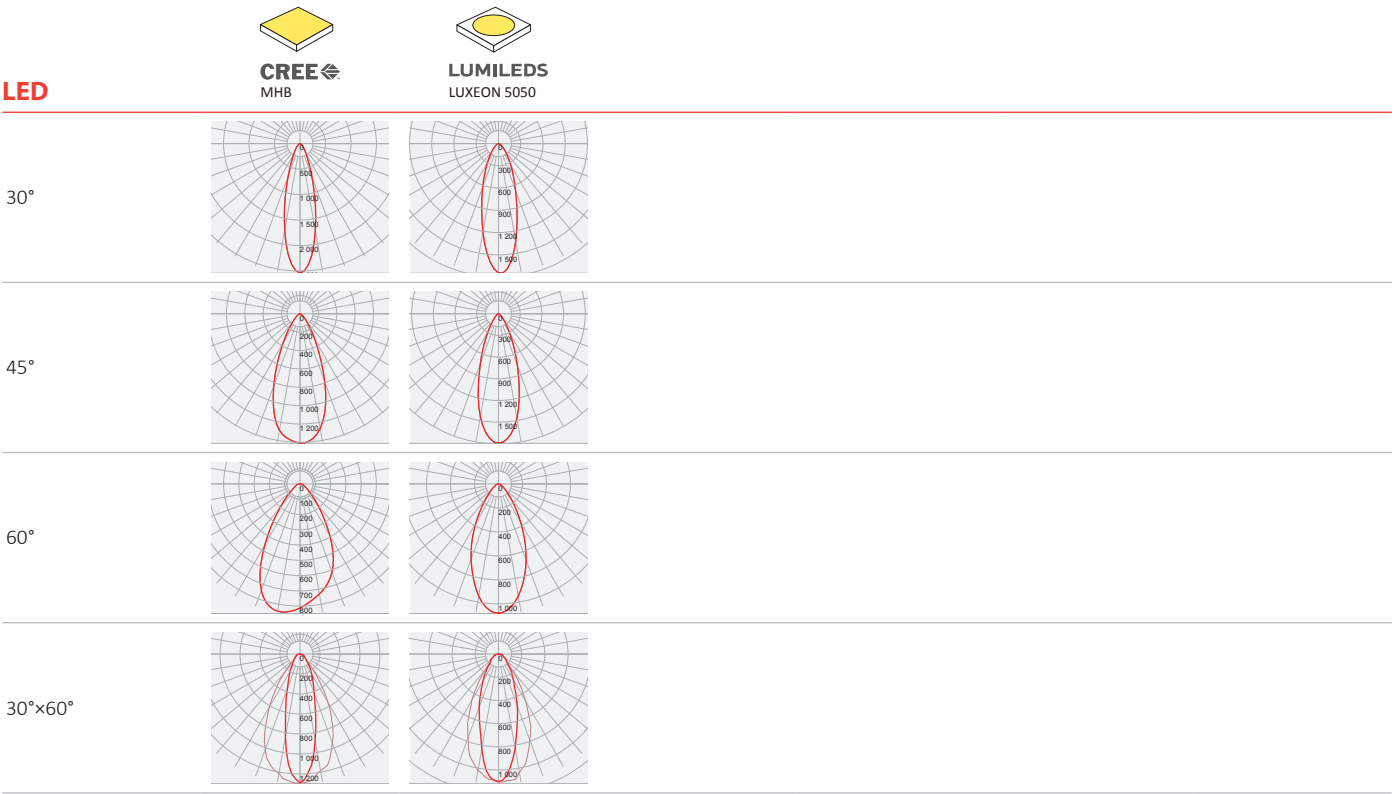

Details by LED

Part No	Holder	LED Package Size	LED
LL01ZZ-DBI××L06	 LL01ZZWM30H2	5050	 CREE MHB  LUMILEDS LUXEON 5050

LED	Part No	FWHM	cd / lm	IES
 CREE MHB	LL01ZZ-DBI30L06-M2	27°	2.5	↓
	LL01ZZ-DBI45L06-M2	43°	1.4	↓
	LL01ZZ-DBI60L06-M2	59°	0.8	↓
	LL01ZZ-DBI3060L06-M2	27°×57°	1.2	↓
 LUMILEDS LUXEON 5050	LL01ZZ-DBI30L06-M2	31°	1.7	↓
	LL01ZZ-DBI45L06-M2	35°	1.7	↓
	LL01ZZ-DBI60L06-M2	48°	1.0	↓
	LL01ZZ-DBI3060L06-M2	34°×54°	1.1	↓

Product Nomenclature

Ledlink Led Type Lens Angle Holder
LL 01 ZZ -DBI 30 L06 -M2
Lens Dot Number Serial Number Type of Material

Ledlink Optics, Inc

Taiwan HQ

15F, No.655, Bannan Rd., Chung-Ho Dist.,
New Taipei City, Taiwan 235

Ledlink Optics (Dongguan) Co., Ltd

Dongguan Factory

No.5, TianKeng Industrial Dist., HengLi Town, DongGuan City,
GuangDong Province, China 523478

Ledlink Optics (Yangzhou) Co., Ltd

Yangzhou Factory

No.180, LinJiang Rd., YangZhou City, Jiangsu Province, China 225009

www.ledlink-optics.com

service@ledlink-optics.com

